

Guardian Angel™

WINDOW GUARDS


How to Measure your Single/Double Hung Windows

The Guardian Angel window guard is available in several sizes. It's important that your windows are measured prior to placing an order to ensure you receive the correct guard. Please be sure to read the warnings before proceeding.

WARNINGS

- Before installation, verify local building and fire codes are not being violated.
- This window guard is intended to protect against potential falls by children age 5 and under.
- Window guard must be installed in solid frame material or stud for proper operation.
- There should be no openings exceeding 4 inches anywhere in the guarded area.
- Failure to follow all manufacturer's installation and safety instructions may reduce the effectiveness of this product and increase the risk of accidental window falls.
- Do not install a guard horizontally, or a guard meant for double hung windows, in a casement/sliding window. A child could use the guard as a ladder and fall through the unguarded area of the window.
- This product is not intended for installation outside of the home/window where it will be exposed to inclement weather conditions.
- This product is not intended as a substitute for proper adult supervision.
- Guardian Angel Window Guards are not meant to protect children from intruders.

Single/double hung windows consist of two separate window panels. Typically, sliding the bottom panel upwards opens the window.

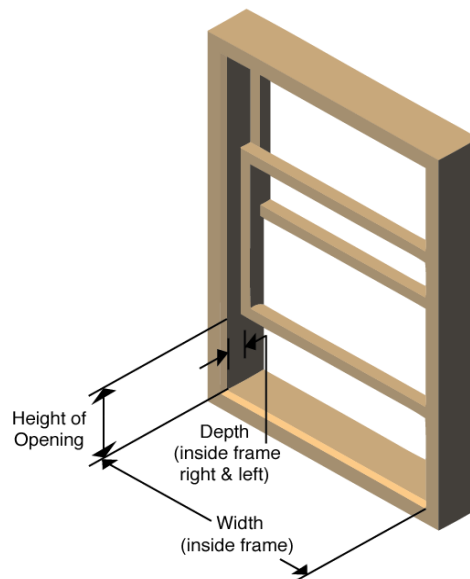

1) Measure the depth of the window frame where the posts will be mounted (inside right and left sides of window frame). *If the depth of the frame is less than $\frac{3}{4}$ inch, the guard will need to be mounted on the outside of the window frame (on the molding or wall around the window). The end posts are $\frac{3}{4}$ inch wide and need at least that much space for installation. Please keep in mind, the end posts also need to be screwed into solid material or stud for proper operation.

2) Once you determine if you are installing the guard on the inside or outside of the window frame (on the molding or wall), measure the width of that area. This will determine the width of the guard.

3) Measure the height of the window opening with the window fully open. *The height of the guard is 21 $\frac{3}{8}$ inches. The window should not exceed this height. If the window's opening is more than 21 $\frac{3}{8}$ inches high, you

can use a window stop to prevent the window from opening above the guard. If the top window panel opens, and it can't be secured, the entire window must be guarded. You will need a vertical style guard (see instructions on [how to measure sliding windows](#)).

Cautionary Note:

When measuring your windows, please keep in mind there should be no openings exceeding 4 inches in the guarded area.

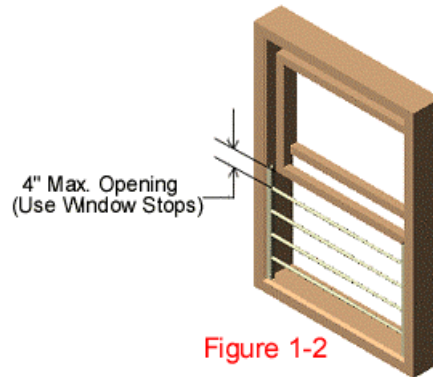


Figure 1-2

**For more information or to purchase guards, please contact
Automatic Specialties, Inc.**

1-800-445-2370

**Monday through Friday
9:00 AM to 5:00 PM EST**

**or visit
www.angelguards.com**